



OVERSEAS TRADING SERVICES
O.T.S.



Generator Set Data Sheet

MPG300KVA

PK@50Hz 300KVA/240KW

Powered by



Main Features



DIESEL GENERATING SET



PERKINS
1506A-E88TAG5



400/230V,
380/220V



3 phase
50 Hz



1500rpm



6CYLINDERS



41 LITRE




33.2 LITRE

Standby Power: 330 KVA - 264 KW

Prime Power: 300KVA - 240 KW


Open Skid

Length (L) 285 cm
Height (H) 185 cm
Width (W) 105 cm
Weight 2200 kg
Daily Tank 305 L

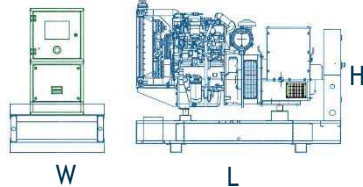

Sound Proof

Length (L) 395 cm
Height (H) 200 cm
Width (W) 145 cm
Weight 3800 kg
Daily Tank 440 L

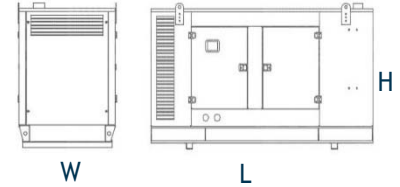

Acoustic pressure level @3m

79 dBA

ENGINE: PERKINS 1506A-E88TAG5

Engine power output	273 kWm-366 hp
Cooling System	Water Cooled
Displacement / Capacity	8.8 Liter
No. of cylinders	6
Cylinder Arrangement	Vertical In line
Induction System	Turbocharged aftercooled
Bore and Stroke	112 x 149 mm
Cycle	4 stroke
Combustion System	Direct Injection
Compression Ratio	16.1:1 nominal
Rotation	Anti-clockwise, viewed on flywheel
Frequency and Engine Speed	50Hz & 1500rpm

Starting voltage	24V
Governor	Electronic
Oil capacity	41 Liter
Coolant capacity	33.2 Liter
24 V D.C. starter and charge alternator	
Replaceable fuel filter, oil filter and dry element air filter	
Cooling radiator and fan	
Starter battery (maintenance free)	
Fuel consumption at 100% load	64.9 L/hr.
Fuel consumption at 75% load	48.2 L/hr.
Fuel consumption at 50% load	33 L/hr.





ALTERNATOR: LEROY SOMER

Rating	300KVA	Model	TAL046F
No. of bearing	1	Insulation class	H
		Wires	6
Total Harmonic Content	<3.5%	Excitation System	SHUNT
Ingress Protection	IP23	AVR Model	R150
Winding Pitch	2/3(n° 6)		
Over-speed	2250 mn	Voltage Regulation	±1%
Circuit Breaker Capacity	MCCB 500Amps		

STANDARD CANOPY

Sound Level	79 dBA @ 3 meters in free space
Design	Rigid canopy base manufactured by black steel metal sheets welded on canopy body with internal Reinforcement and bolted on the body. 4 service doors with stainless steel door locks. Stainless steel heavy duty door hinges. Black steel canopy body – 2mm and 3mm treated with greasing phosphate and anticorrosion treatment with electro static power coating.
Connection	Flexible
Sound isolation	Rockwool with perforated sheets
Muffler	Muffler with rain cap

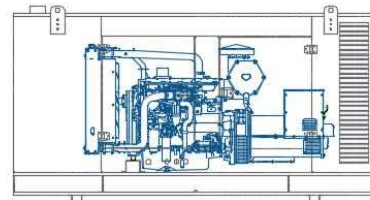

CONTROL (MONITORING) SYSTEM: DEEP SEA

Control panel model	DSE6010
	The DSE6010 is an Auto Start Control Module for single gen-set applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.
Metering and Alarm indications	<ul style="list-style-type: none"> • Generator frequency • Under-speed, Over-speed • Generators volts (L-L, L-N) • Generator current • Engine Oil pressure • Fail to start/ stop • Emergency stop • Failed to reach loading voltage / frequency • Engine coolant temperature • Fuel level (warning or shutdown) – Optional • Hours run counter • Battery volts • Charge fail • Low DC voltage • CAN diagnostics and CAN fail/ error

Gen-sets can be equipped with different control panels depending on usage, such as: DSE6020, DSE7310, DSE7320 or DSE8610 (Synchronization Panel)



OVERSEAS TRADING SERVICES
O.T.S.

MPG 300KVA

PK@50Hz 300kVA/240 kW

Powered by  Perkins

 LEROY SOMER

OPTIONAL EQUIPMENTS

ATS (Automatic Transfer Switch)
Water Jacket Heater
Battery Charger
Fuel Water Separator
Electrical Fuel Transfer Pump
Battery Heater

Alternator Anti-condensation Heater
Load Bank
Electrical Fuel Level Sensor
Fuel Level Protection
Spare Parts
Oil Heater

STANDARD SPECIFICATIONS

Warranty All generating sets are covered under warranty policy for a period of 12 months in line with the manufacturers' warranty policy

Quality Standards The equipment meets the following standards: BS4999, BS5514, IEC 60034, VDE0530, NEMA MG 1.22 and ISO 8528

Engine Filtration System Air filter, Fuel filter, Oil filter. All filters have replaceable elements

Fuel System On generating sets up to 650KVA, the base frame design is incorporated with an integral fuel tank with a capacity of approx... 8 hours running at average load. The tank is supplied with fill cap breather, fuel feed and return pipes to the engine and drain plug

Cooling Radiator Radiator and cooling fan, complete with safety guards, designed to cool the engines at high ambient temperatures

Exhaust System Heavy duty industrial exhaust silencer
Silencer noise reduction level: 22 (dB)
Maximum allowable back pressure: 10 (kPa)

Documentation Operation & Maintenance manual, circuit wiring diagrams and commissioning / fault finding instruction leaflets are accompanied with the generator

Mounting Arrangement

Base Frame:

The complete generating set is mounted as a whole in a heavy duty fabricated steel base frame.

Coupling:

The engine and alternator are directly coupled by means of an SAE flange. The engine flywheel is flexibly coupled to the alternator rotor

Anti-Vibration Mounting Pads:

Anti-vibration pads are affixed between the engine/ alternator feet and the base frame thus ensuring complete vibration isolation of the rotating assembly

Safety Guards:

The fan & fan drive along with the battery charging alternator are safety guard protected for personnel protection

Factory Tests:

The generating set is load tested before dispatch. All protective devices control functions and site load conditions are simulated. The generator and its systems are checked before dispatch

Equipment Finishing:

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability

Assembled in facilities certified to ISO 9001

**OTS - Generators 3307, 1st Floor, Tayouneh, Facing Ghobeiry Police Station
Ghobeiry -Lebanon Phone: +961-1-271010, Whatsapp: +96181432901
info@ots-int.com - www.ots-int.com**